
4 2 1


General Notes


- New 10mm glass post height is <u>24-1/8 in</u> above the deck surface.
- Installation of posts and glass is exactly the same as previous systems.
- New top cap is a CenDek custom shape that incorporates a vinyl insert with easy to use line, corner and custom corner connections.

Recommended Top Cap Install

- Measure and fit top cap with out vinyl insert on glass or inside top cap.
- Mark and pre-drill any 90 degree corner screw holes (see sheet 2 for details).
- Remove top cap and place only vinyl insert along glass edge.
- Gently lay top cap on top of vinyl without pressing it fully down. This way you can slide the top cap back and forth to configure and screw one side of the Line and/or custom corner connector plates in position.
- When using a wall bracket, remember the wall bracket plate must attach to top cap first before fastened to a wall.
- Once top cap is in its final position press it firmly down onto the vinyl insert (should hear and feel a click) and continue to screw other side of connectors. It might be ok to fully fasten the connectors on both sides before pressing top cap onto vinyl insert.
- SEE SHEET 2 FOR DETAILS.

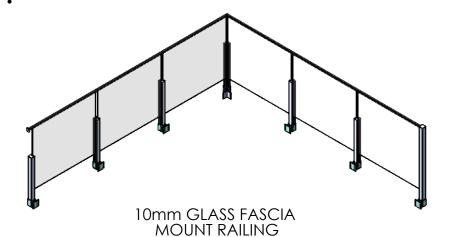

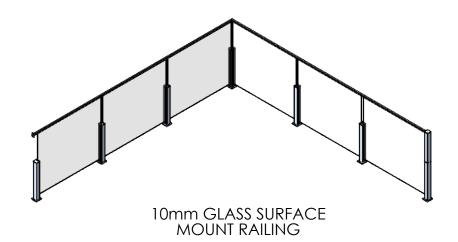



CenDek 10mm Glass Top Cap



CenDek Railings Ltd.

PROPRIETARY AND CONFIDENTIA

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CENDER RAILINGS LID. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CENDER RAILINGS LID IS PROHIBITED.

_	DRAWN BY	Admin	
	CREATED	5/12/2020	
	MATERIAL		
	DIE NO.		
	ALL DIMENSION IN INCHES/mm		

DESCRIPTION

10MM GLASS RAILING SYSTEM
INSTALL INSTRUCTION

Part No.		Eng No. 2080A	
Weight	lbs	SHEET 1 OF 2	Rev -

3

2

, ,

